
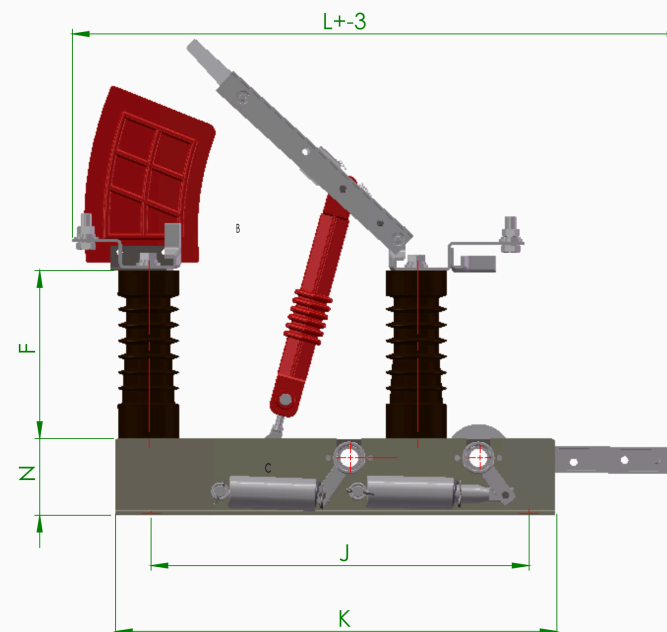


Características dimensionais da seccionadora

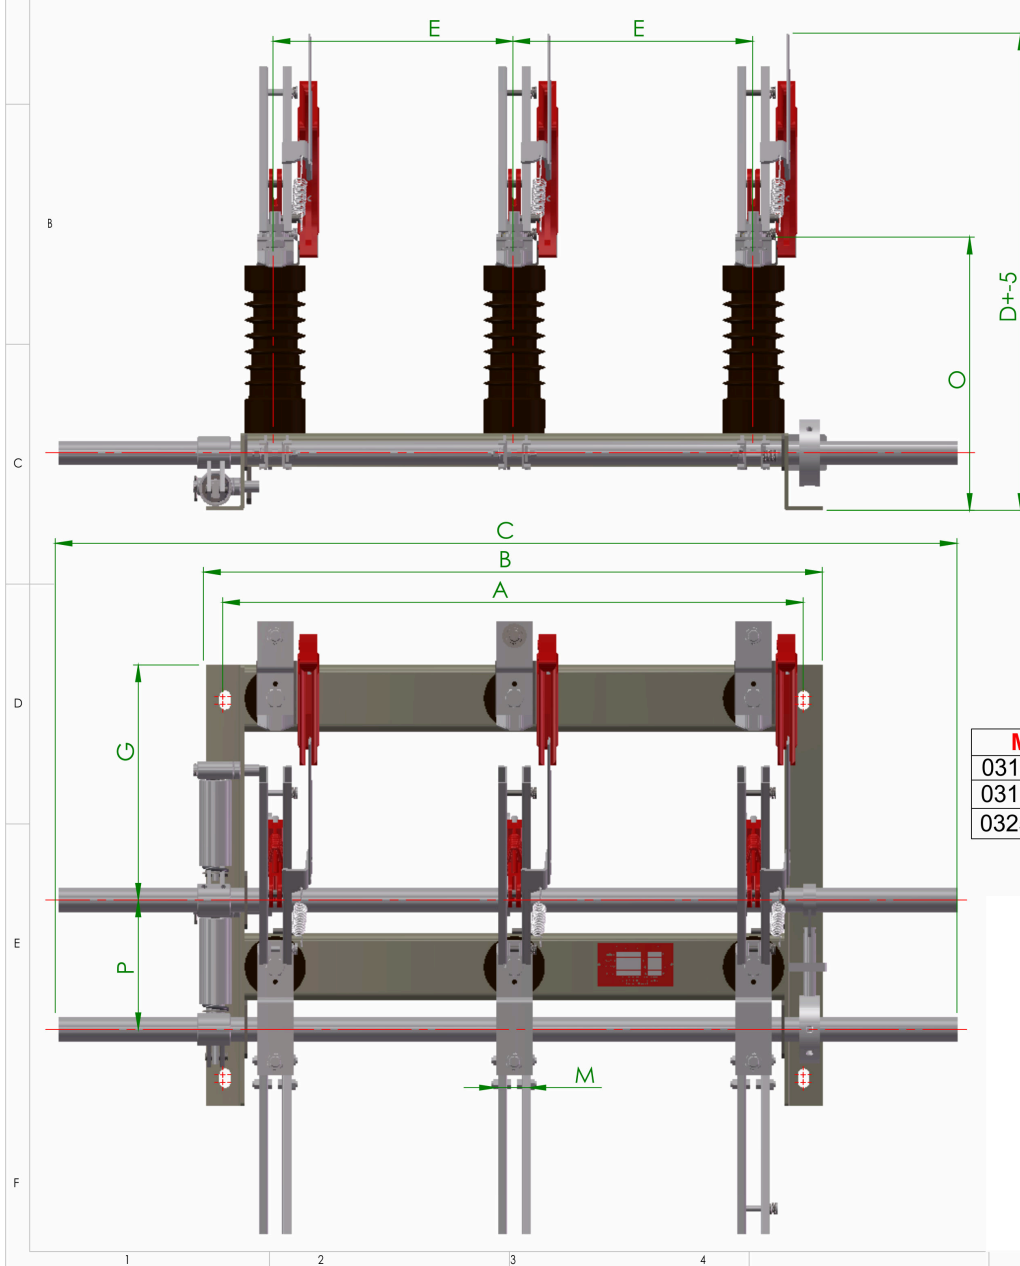

15 A 24kV - 200 a 630A

Chave seccionadora tripolar, com carga com aterramento

Modelo	A	B	C	D	E	F	G	I	J	K	L	M	N	O	P
0315LA	605	645	990	530	250	160	250	14.5	410	460	626	38.1	80	273	135
0317LA	605	645	990	550	250	180	250	14.5	410	460	644	38.1	80	290	135
0325LA	710	750	1180	600	300	210	273	17	470	530	745	38.1	80	320	184

