



**CLIQUE E FAÇA  
SEU ORÇAMENTO !**



**CHARDON**  
GROUP

15-CSTO/25-CSTO/35-CSTO

## **Chardon 15kV, 25kV and 35kV Class Cold Shrinkable Termination**



[www.chardongroup.com](http://www.chardongroup.com)

## APPLICATION

The Chardon Outdoor Cold Shrinkable Terminations deliver effortless installation and consistent, trustworthy performance when terminating medium voltage cables in challenging outdoor settings. These outdoor terminations are constructed from high-quality silicone rubber, with a UV-resistant characteristic that helps them withstand harsh outdoor environmental conditions, including UV radiation and varying weather patterns.

Chardon Outdoor Cold Shrinkable Terminations include a stress-controlling compound housing,

conveniently pre-assembled on a plastic "hold-out" tube. Upon removal of the hold-out tube, the stress relief housing contracts onto the cable, securing a reliable and firm connection. The terminations are user-friendly and versatile, with no need for tools or heat sources during installation.

Chardon Cold Shrink Terminations are built to endure for the entire life of the cable, designed to withstand voltages up to 35 kV, and tested according to IEEE Standard 48.

## VOLTAGE RATINGS: 15-CSTO

<b>Voltage Class</b>	15 kV
<b>Minimum Partial Discharge Voltage Level</b>	13 kV < 5.0pC
<b>AC Voltage 1 Min Dry Withstand</b>	50 kV
<b>AC Voltage 10s Wet Withstand</b>	45 kV
<b>Lightning Impulse (BIL) Voltage Withstand</b>	110 kV
<b>Cyclic Aging</b>	26 kV / 30day
<b>AC Voltage 5h Dry Withstand</b>	31 kV
<b>DC Voltages 15 Min Dry Withstand</b>	75 kV

## VOLTAGE RATINGS: 25-CSTO

<b>Voltage Class</b>	25 kV
<b>Minimum Partial Discharge Voltage Level</b>	22 kV < 5.0pC
<b>AC Voltage 1 Min Dry Withstand</b>	65 kV
<b>AC Voltage 10s Wet Withstand</b>	60 kV
<b>Lightning Impulse (BIL) Voltage Withstand</b>	150 kV
<b>Cyclic Aging</b>	43 kV / 30day
<b>AC Voltage 5h Dry Withstand</b>	50 kV
<b>DC Voltages 15 Min Dry Withstand</b>	105 kV

## VOLTAGE RATINGS: 35-CSTO

<b>Voltage Class</b>	35 kV
<b>Minimum Partial Discharge Voltage Level</b>	30 kV < 5.0pC
<b>AC Voltage 1 Min Dry Withstand</b>	90 kV
<b>AC Voltage 10s Wet Withstand</b>	80 kV
<b>Lightning Impulse (BIL) Voltage Withstand</b>	200 kV
<b>Cyclic Aging</b>	61 kV / 30day
<b>AC Voltage 5h Dry Withstand</b>	71 kV
<b>DC Voltages 15 Min Dry Withstand</b>	140 kV

## ORDERING INFORMATION



### Three-Core Kit Contents:

- / Termination body
- / Cold Shrinkable Tube
- / Cold Shrinkable Breakout
- / Sealing Tape
- / Filling Tape
- / PVC Tape
- / Silicone Tape
- / Sandpaper
- / Paper Towel
- / Silicone Lubricant
- / Gloves
- / Triangle Cone
- / Constant-Force Spring
- / Grounding Braid
- / Copper Tape
- / Cable Lug (Optional)
- / Installation Instructions
- / Packing List




### Single Core Kit Contents:

- / Termination body
- / Cold Shrinkable Jacket Seal (35-CSTO only)
- / Sealing Tape
- / PVC Tape
- / Silicone Tape
- / Sandpaper
- / Paper Towel
- / Silicone Lubricant
- / Gloves
- / Grounding Kit (Optional)
- / Cable Lug (Optional)
- / Installation Instructions
- / Packing List

## ORDERING INFORMATION

### Termination Selection:

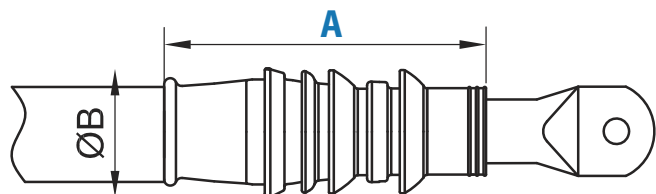


Unit: mm (milli meter)

Part Number		Creepage Distance (mm)	Shades (Qty)	Dimension (A)(Max.)(mm) Single/Three Core	Dimension (ØB)	Cable Insulation O.D.Range (mm)	Tail Length (mm)
Single Core*	Three Core						
15-CSTO-A	T-15-CSTO-A	510	5	300/290	67	13.2-17.0	450max
15-CSTO-B	T-15-CSTO-B	510	5	300/290	71	16.8-27.0	450max
15-CSTO-C	T-15-CSTO-C	510	5	300/290	79	25.3-50.0	500max
25-CSTO-A	T-25-CSTO-A	672	6	380/370	81	15.2-22.4	450max
25-CSTO-B	T-25-CSTO-B	672	6	380/370	85	20.4-35.4	500max
25-CSTO-C	T-25-CSTO-C	672	6	380/370	100	34.0-60.0	500max
35-CSTO-A	T-35-CSTO-A	930	10	470/470	87	18.7-26.0	450max
35-CSTO-B	T-35-CSTO-B	930	10	470/470	94	24.9-41.1	500max
35-CSTO-C	T-35-CSTO-C	930	10	470/470	105	36.6-59.0	500max

\*Each single core termination part can be assembled with one grounding kit if needed. To order a grounding kit, add "GKT" in the end of the Chardon CSTO part number.

Example: 25-CSTO-A-GKT

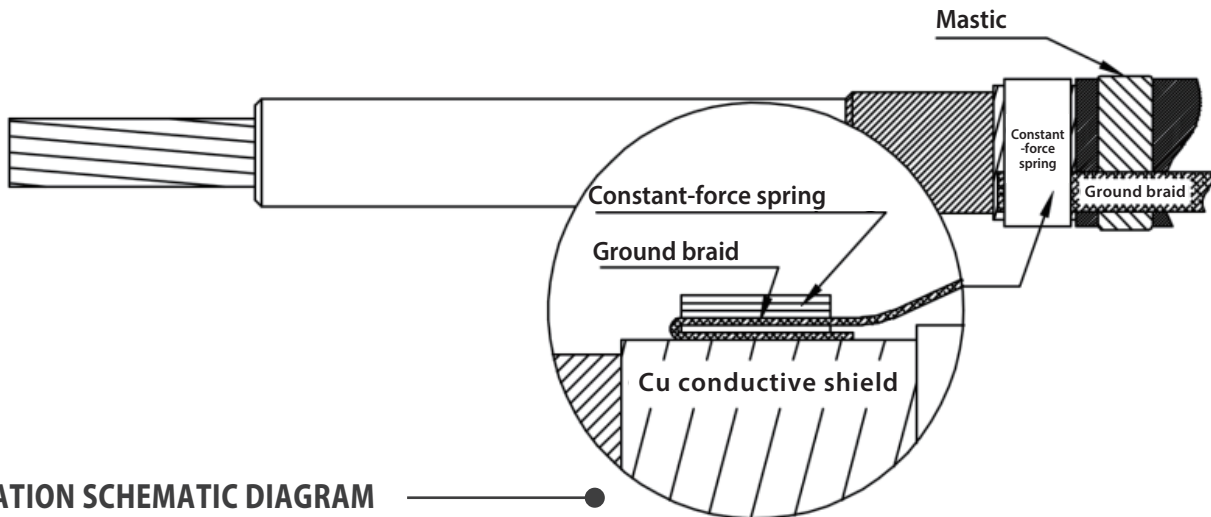

**FIXATION SCHEMATIC DIAGRAM**

**Each kit Contains:**

- / Ground Braid
- / Constant Force Spring
- / Copper Tape

**Important:**

The Cold Shrink Terminations are suitable for use with metallic screen cables made of copper tape or copper wire, and armor cables made of steel tape or steel wire.

If your cable is different from the above types, please contact your local distributor or Chardon representative.

## ORDERING INFORMATION

Selection of Shear Bolt Lug, if requested:

Part Number	Conductor Range(mm <sup>2</sup> )
SBC-A-25-95-12/1-AL	25-95
SBC-A-25-95-16/1-AL	25-95
SBC-A-35-150-12/1-AL	35-150
SBC-A-35-150-16/1-AL	35-150
SBC-A-35-150-12/2-AL	35-150
SBC-A-35-150-16/2-AL	35-150
SBC-A-70-240-12/2-AL	70-240
SBC-A-70-240-16/2-AL	70-240
SBC-A-120-300-12/2-AL	120-300
SBC-A-120-300-16/2-AL	120-300
SBC-A-185-400-12/3-AL	185-400
SBC-A-185-400-16/3-AL	185-400
SBC-A-300-630-12/3-AL	300-630
SBC-A-300-630-16/3-AL	300-630
SBC-A-300-630-20/3-AL	300-630

## Selection of Compression Lug, if requested:

Part Number	Lug Material	Conductor Size (mm <sup>2</sup> )
DTM-16-8	Copper	16
DTM-25-8	Copper	25
DTM-35-10	Copper	35
DTM-50-10	Copper	50
DTM-70-12	Copper	70
DTM-95-12	Copper	95
DTM-120-14	Copper	120
DTM-150-14	Copper	150
DTM-185-16	Copper	185
DTM-240-16	Copper	240
DTM-300-20	Copper	300
DTM-400-20	Copper	400
CTAL-16-8	Aluminum	16
CTAL-16-10	Aluminum	16
CTAL-25-8	Aluminum	25
CTAL-25-10	Aluminum	25
CTAL-35-8	Aluminum	35
CTAL-35-10	Aluminum	35
CTAL-50-10	Aluminum	50
CTAL-50-12	Aluminum	50
CTAL-70-10	Aluminum	70
CTAL-70-12	Aluminum	70
CTAL-95-8	Aluminum	95
CTAL-95-10	Aluminum	95
CTAL-95-12	Aluminum	95
CTAL-120-10	Aluminum	120
CTAL-120-12	Aluminum	120
CTAL-120-16	Aluminum	120
CTAL-185-12	Aluminum	185
CTAL-185-16	Aluminum	185
CTAL-240-12	Aluminum	240
CTAL-240-16	Aluminum	240
CTAL-300-12	Aluminum	300
CTAL-300-16	Aluminum	300
CTAL-400-16	Aluminum	400
CTAL-500-16	Aluminum	500

**\*NOTE:**

- 1.The suffix numbers (8, 10, 12, 14, 16, 20) indicate the palm hole diameter, corresponding to stud sizes M8, M10, M12, M14, M16, and M20.
- 2.For a more accurate selection, please specify your cable size and type when placing an order.



### **ANHUI CHARDON ELECTRIC LTD.**

No.808 Taiji Road Economic Develop Zone of Guangde County  
Anhui China  
Tel: 0563-2216688  
Fax: 0563-2251806

### **CHARDON TAIWAN CORPORATION**

No.37 Min-Chie Road, Tung Lo Industrial Park, Miao Li, Taiwan 366  
Tel:+886-37-984385  
Fax:+886-37-984770

### **SHANGHAI CHARDON ELECTRIC LTD.**

Room 1202, office building No.399, Yun Gu Road, Jiading district,  
Shanghai, China 201801  
Tel: +86-21-39105900  
Fax: +86-21-39105916

[www.chardongroup.com](http://www.chardongroup.com)·[info@chardongroup.com](mailto:info@chardongroup.com)